


- #1** DIRECTLY IN YOUR VEHICLE'S OBDII PORT.  
Please check for its exact location in the automotive manual.



- #2** WITH THE USE OF A THREE-PIN ADAPTER.  
Avoids interaction with the vehicle's computer.

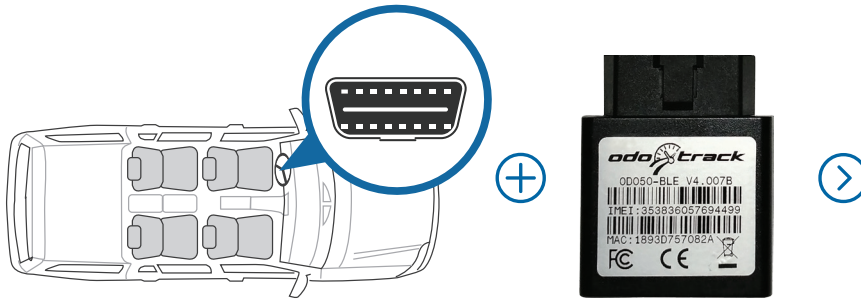

- #3** WITH A 12 VDC ADAPTER IN YOUR VEHICLE'S CIGARETTE LIGHTER.



**NEVER USE THE USB SERVICE PORT AT THE RISK OF DAMAGING THE DEVICE**

Replacement at your expense.

If you plan on not using your vehicle for longer than a week, it is strongly recommended you disconnect your ODOTRACK device in order to keep the car battery from self-discharging.